


## 3 Faz / 3 Faz UPS Bağlantı Şeması

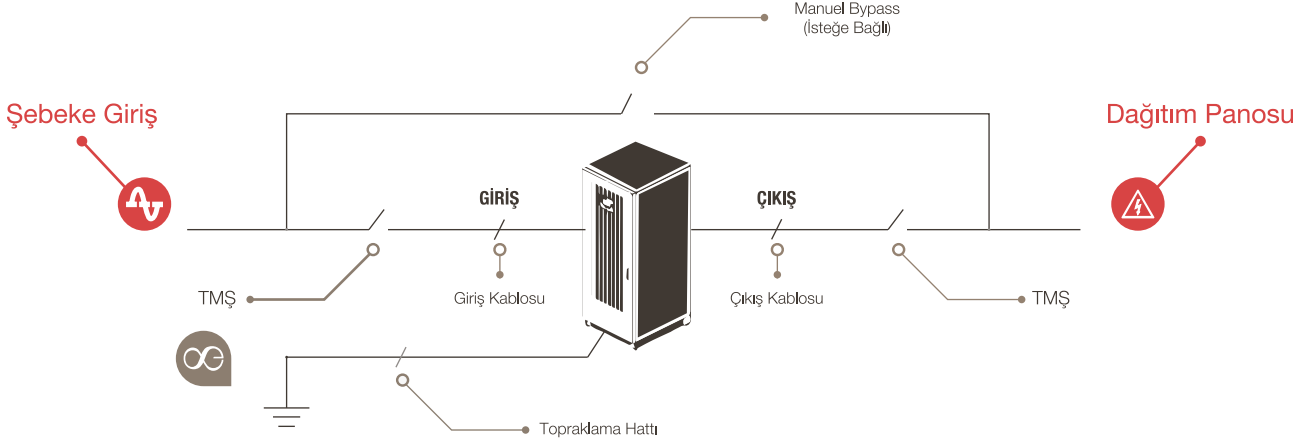

UPS Gücü (KVA)	Giriş Kablosu Kesiti	Çıkış Kablosu Kesiti	Topraklama Kablosu Kesiti	Giriş / Çıkış Sigortaları (TMS)
10	4x4 mm <sup>2</sup>	4x4 mm <sup>2</sup>	1x4 mm <sup>2</sup>	40A
15	4x6 mm <sup>2</sup>	4x6 mm <sup>2</sup>	1x6 mm <sup>2</sup>	40A
20	4x10 mm <sup>2</sup>	4x10 mm <sup>2</sup>	1x10 mm <sup>2</sup>	63A
30	3x10+6 mm <sup>2</sup>	3x10+6 mm <sup>2</sup>	1x10 mm <sup>2</sup>	80A
40	3x16+10 mm <sup>2</sup>	3x16+10 mm <sup>2</sup>	1x10 mm <sup>2</sup>	100A
60	3x25+16 mm <sup>2</sup>	3x25+16 mm <sup>2</sup>	1x16 mm <sup>2</sup>	160A
80	3x35+16 mm <sup>2</sup>	3x35+16 mm <sup>2</sup>	1x16 mm <sup>2</sup>	200A
100	3x50+25 mm <sup>2</sup>	3x50+25 mm <sup>2</sup>	1x25 mm <sup>2</sup>	250A
120	3x50+25 mm <sup>2</sup>	3x50+25 mm <sup>2</sup>	1x25 mm <sup>2</sup>	300A
160	3x70+35 mm <sup>2</sup>	3x70+35 mm <sup>2</sup>	1x35 mm <sup>2</sup>	300A
200	3x95+50 mm <sup>2</sup>	3x95+50 mm <sup>2</sup>	1x50 mm <sup>2</sup>	400A
250	3x150+70 mm <sup>2</sup>	3x150+70 mm <sup>2</sup>	1x50 mm <sup>2</sup>	500A
300	3x185+95 mm <sup>2</sup>	3x185+95 mm <sup>2</sup>	1x70 mm <sup>2</sup>	630A
400	2/3x150+150 mm <sup>2</sup>	2/3x150+150 mm <sup>2</sup>	1x70 mm <sup>2</sup>	800A
500	3/3x150+240 mm <sup>2</sup>	3/3x150+240 mm <sup>2</sup>	1x95 mm <sup>2</sup>	1000A

\* Not: UPS girişine bağımsız topraklama hattı çekilmelidir.

Deri OSB Arıtma Cd. No:6-A Tuzla,  
İstanbul  
T: 216 494 0 444  
F: 216 494 3 000  
info@necron.com.tr

**necron**  
energy